

LAMI Revo

Full Auto Laminator






Overwhelming Productivity with Fully Automatic Operation From Feeding to Cutting.

The “Revo series” fully automatic laminator allows seamless operation from laminating to cutting with just one-touch. Its compact design offers flexible installation, while its fast and easy operation improves work efficiency. A wide range of laminating film thicknesses ensures it meets the diverse needs of users.





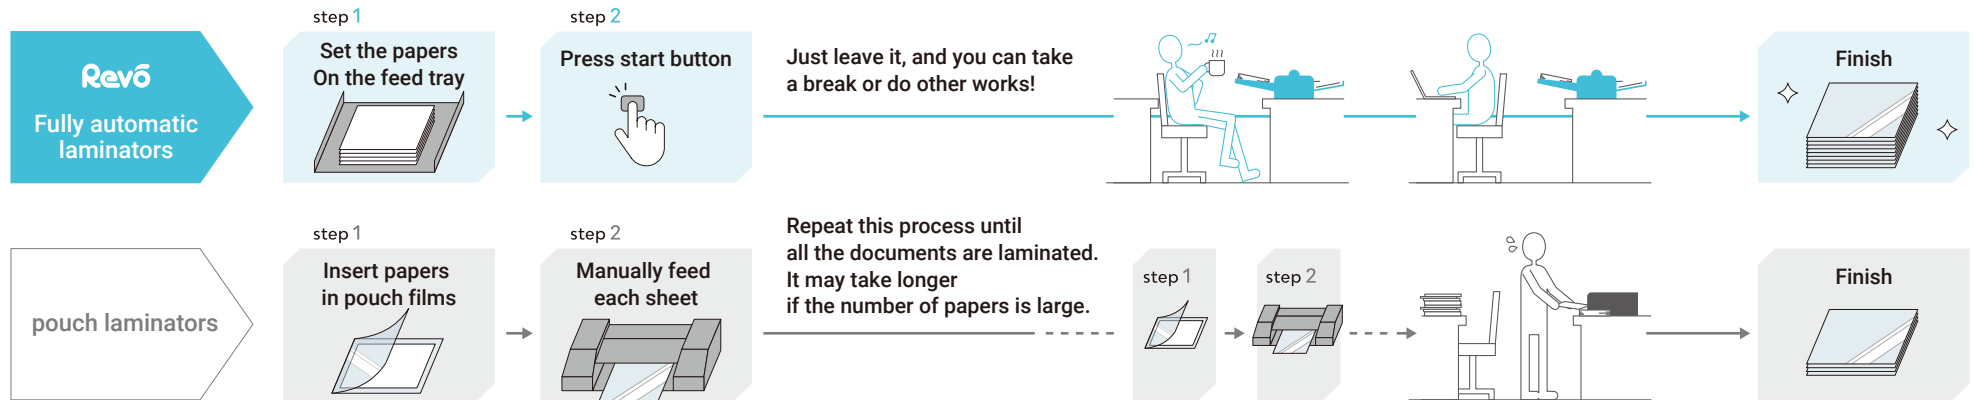

Reasons to Choose LAMI Revo Series

Advantages of Fully Automatic Laminators Over Manual Feed Laminators



Recommended Model Based on Purpose & Usage

Guideline for lamination workload (A4)	For General Use		For professional use	
	100-500 sheets per month	300-1000 sheets per month	800-2000 or more sheets per month	
	Revo Any 	Revo Office 	Revo T14 	Revo Flex 
Number of processed sheets per Hour (A4)	200sheets	270sheets	440sheets	190sheets~550Sheets*
Film Thickness	50μ, 80μ, 100μ, 125μ	50μ, 80μ, 100μ, 125μ	50μ, 80μ, 100μ, 125μ	38μ, 80μ, 100μ, 125μ
Side Trimming Function	-	-	-	-

*When selecting the 'With margin & No film waste' setting

Films Line Up

Revo FILM HOT

Fully automatic laminator's Film

1 box contains 4 rolls (Adhesive side: Outside) * Exception: Revo Flex Films, 1 box contains 2 rolls (Adhesive side: Inside).

Model		Revo-Any					Revo-Office												Revo-T14										Revo-Flex											
Thickness		50μ	80μ	100μ		125μ	50μ				80μ				100μ		125μ		50μ		80μ				100μ		125μ		38μ		80μ		100μ		125μ					
Type		Gloss	Gloss	Gloss	Matte	Gloss	Gloss	Matte	Gloss	Gloss	Gloss	Matte	Gloss	Gloss	Gloss	Matte	Gloss	Matte	Gloss	Gloss	Matte	Gloss	Matte	Gloss	Matte	Gloss	Matte	Gloss	Matte	Gloss	Matte	Gloss	Matte	Gloss	Matte					
Width	mm	305	305	305	305	305	305	305	298	156	305	305	298	156	305	305	305	305	156	305	305	305	305	156	305	305	305	305	320	320	320	320	320	320	320	320				
Length	M	60	30			25	100								50								150		100		50		100		80		300		150		150		150	

Revø Any

Entry Model
Designed for workplace automation.



Entry Model of fully automatic laminator

Offers the convenience of fully automatic laminators at a reasonable price.

Simple operation panel

Start & Stop and sheet count settings are straightforward, making it easy to use.



* Exclusive output tray.



Revø Office

Standard Model
Easy lamination with cassette films and optimal laminating speed.



Patent
Obtained

Easy Maintenance

The "Cover-Open" Structure allows for easy cleaning of the interior.

Easy Film Setting

The cassette film system makes film setup easier, compared to previous automatic laminators.

*The cassette film technology of Revø-Office is patented.




* Exclusive output tray.



Revø T14

Professional Model
Delivers high quality and productivity by processing large volumes in a short time.

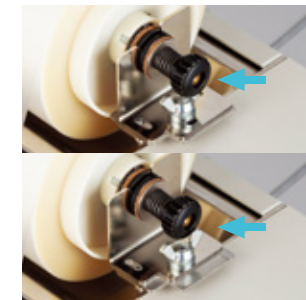

High Laminating Speed

Supports tight deadlines with its productivity to process 440 A4 sheets per hour.

Easy Edge Adjustment

Enhances lamination quality by adjusting the edges of the film.




* Exclusive up & Down lever.



Revø Flex

High-End Model
Meets demanding needs with its 4-side trimming function.

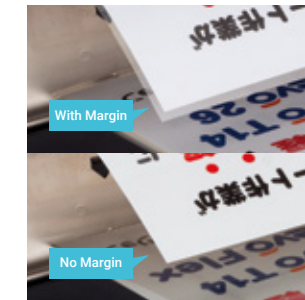


With / No Margin Settings

In addition to the regular "with margin" setting, the "no margin" option can be easily selected, eliminating the need for post-processing.



Easy Sheet Feed Skew Adjustment

Allowing to adjustment not only left and right, but also in the oblique direction.

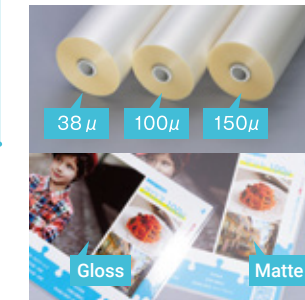

Wide Variety of Film Thickness

Choosing from a range of films from 38μ to 150μ, allowing selection based on the application, with options from thin to thick.



* When the stand, feed tray, and other components are fully assembled.





Revo Any



Revo Office



Revo T14



Revo Flex




Max. Lamination Width	A3 (305mm)	A3 (305mm)	A3 (305mm)	320mm
Film Thickness	50/80/100/125μ	50/80/100/125μ	50/80/100/125μ	38/80/100/125/150μ
Paper Size	SRA3/A3/A4/A5/B4/B5/Legal/Letter/Long Mode			
Side Trimming Function	×	×	×	○
Max. Lamination Speed	750mm per minute	1,000mm per minute	1,600mm per minute	2,000mm per minute
Lamination Temperature	90-120°C	90-120°C	90-120°C	80-140°C
Power Requirement	PSE/UL:100V, 600W CE/KC: 230V, 600W	PSE/UL:100V, 1,000W CE/KC: 230V, 1,000W	PSE/UL:100V, 1,000W CE/KC: 230V, 1,000W	PSE/UL:100V, 1,000W CE: 230V, 1,000W
Mashine Size [W×D×H(mm)]	630 ^{*1} ×525×280	680 ^{*1} ×506×337	530 ^{*2} ×900×420	1,300 ^{*3} ×610 ^{*3} ×1,080 ^{*3}
Warming Up Time	7 minutes ^{*4}	5 minutes ^{*4}	5 minutes ^{*4}	5 minutes ^{*4}

*1: Exclusive output tray *2: Exclusive up & Down lever *3: When the stand, feed tray, and other components are fully assembled *4: Changes may occur depending on the operating temperature and settings.

Film Cassette For Revo-Office

Save time by preparing a spare film cassette for easy reloading of films.



Stand (Optional)

<Compatible Models>
Revo-Any / Revo-Office / Revo-T14

Easily movable with casters, and allows storage of Revo films inside the stand.



Web site for
Revo series



www.lami-corporation.co.jp/english/series-lamirevo

www.lami-corporation.co.jp/english/series-lamirevo



URL <https://www.lami-corporation.co.jp/english/>
TEL +81-6-6453-1871 / FAX +81-6-6453-1554
E-mail lami-support-global@lami-corporation.co.jp



<https://www.facebook.com/LamiCorporation/>

